


G-Bay

Glare-free DOME Cover




- DLC Premium Listed
- ETL, cETL Listed

- High Lumens 150lm/w
- IP65 Wet Location
- 1-10V dimming in standard
- 5 Years warranty

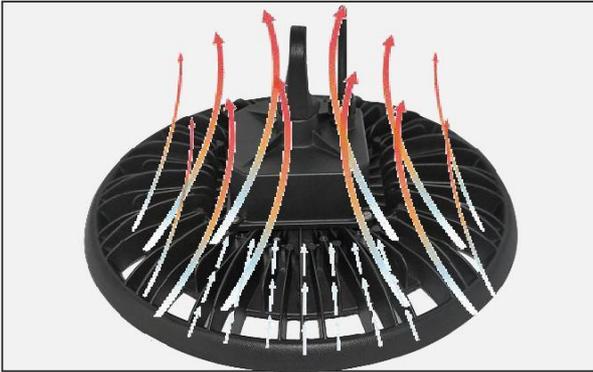

Good Heat Dissipation

Die-Casting Aluminum body, Efficient heat dissipation, directing heat up and out. makes little lumens depreciation.

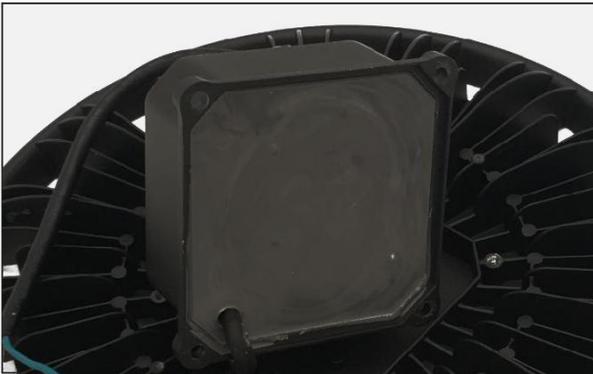

High Quality Driver

Constant Current High quality driver with silica gel. CGT Driver. 1-10V dimming in standard.



Glare-Free DOME Cover

High efficiency milky cover
Up to 150lm/w
Beam angle : 120°



Slim Body Design


Extremely compact design, 40HQ Container can load around 2600pcs 150W, largely save The shipping cost

Parameter

Model No.	HB-100G	HB-150G	HB-200G	HB-240G
Wattage	100W	150W	200W	240W
Luminous Efficacy	150lm/w	150lm/w	150lm/w	150lm/w
Lumens output	14742lm	22616lm	28940lm	34688lm
HID/MF Equivalent	250-400W	400-600W	700-1000W	800-1200W
Fixture Weight	2.1Kg(4.6lb)	2.5Kg(5.5lb)	3.5Kg(7.7lb)	3.5Kg(7.7lb)
LEDs Brand	Lumileds (Philips) SMD3030			
CCT	3000K, 4000K, 5000K,5700K			
CRI	70+ or 80+			
Beam Angle	120°			
Input Voltage	100-277/100-347Vac 50-60Hz			
Dimming	1-10V dim in standard			
Power Factor	>0.95			
IP Rating	IP65 /Wet Location			
Working Temp.	-40° C ~ 50° C (-40° F~122° F)			
Storage Temp.	-40° C ~ 70° C (-40° F~158° F)			
Finish	Black (White, Silvery customized)			
Housing	Die-casting Aluminum			
Diffuser	PC Lens			
Installation	Hanging, Mounting			
Lifespan(>70)	>100,000 Hours			
Certification	ETL, cETL, DLC Premium			


Dimension

Unit: mm(inch)

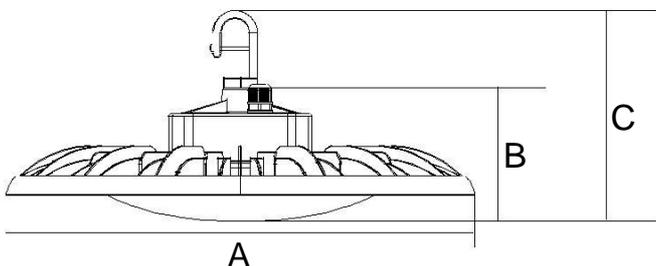

Power	A	B	C
100W	300(11.8")	104(4.1")	169(6.6")
150W	330(13.0")	107(4.2")	172(6.8")
200W	390(15.3")	112(4.4")	177(7.0")
240W	390(15.3")	112(4.4")	177(7.0")

Photometric

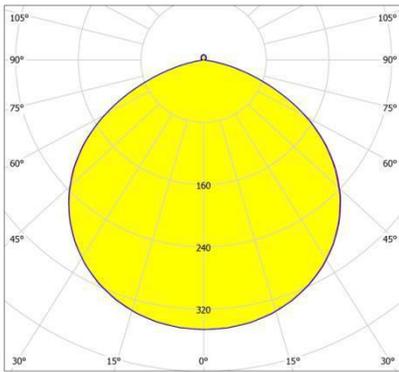

Order Information

Sample: HB-150G50K120

	XXX	XXX	X
Product Family	CCT	Beam Angle	Function
HB-100G = 100W	30K = 3000K	120 = 120° Lens	Blank = 1-10V dim N = Non dim S = ON/OFF Sensor BS = Bi-level Sensor
HB-150G = 150W	40K = 4000K		
HB-200G = 200W	50K = 5000K		
HB-240G = 240W	57K = 5700K		
	65K = 6500K		
In Standard	Options (add as Suffix)		Accessories (order Separately)
Black Finish 150lm/w CRI>70 Input Voltage: 100-277/100-347Vac 50/60Hz	WH = White Finish (MOQ>1000pcs) SV = Silvery Finish (MOQ>1000pcs) Other customized		BK = Mounting Bracket SK = Handing Chain 1m HB-G-90PCR = 90° PC Reflector

Package Information

ITEM	QTY/CTN	G. W.	CTN SIZE	QTY/Pallet Size
HB-100G	1pcs	3.0kg(6.6lb)	36x34x15cm (0.017cbm)	100pcs/120x102x197cm
HB-150G	1pcs	3.3kg(7.3lb)	39x38x15cm (0.017cbm)	88pcs/120x101x203cm
HB-200G	1pcs	4.3kg(10.9lb)	45x43x15cm (0.025cbm)	64pcs/120x102x195cm
HB-240G	1pcs	4.3kg(10.9lb)	45x43x15cm (0.029cbm)	64pcs/120x102x195cm

