


Mini Flood Light

30W | Colour Tunable | 120-277V



Ideal for landscaping, patio, and security lighting, signs, and building facades Excellent replacement for quartz halogen fixtures

Die-Cast Aluminum Housing
with cooling fins for superior heat dissipation



Wattage Adjustable
(70-100%)

Built-in Photocell

56 LED Chips
for even illumination

0.5m Power Cord

High-Impact Polycarbonate Lens/Optics



Complete With Yoke Mount
Knuckle mount sold separately

Colour Tunable
3000K / 4000K / 5000K

Rugged Polyester Powder Coat Finish
(Bronze)

Optional Accessories:
Knuckle Mount (FLM-KNS)

Suggested Substitutions:
FLM-15W-40K-LV-YK
FLM-50W-3CCT-LV

TECHNICAL DATA



LIGHT SPECIFICATIONS


Lumens	4,141 lm
Efficacy	147.5 lm/W @ 4000K
CCT	3000K, 4000K, 5000K
CRI	>70
L70 Life	50,000 hrs
Warranty	10-year

APPROVALS AND LISTINGS


cUL	E482965
DLC	TBA

DIMENSIONS


Yoke Mount (Standard)



Knuckle Mount (Sold Separately)



ILLUMINANCE AT A DISTANCE

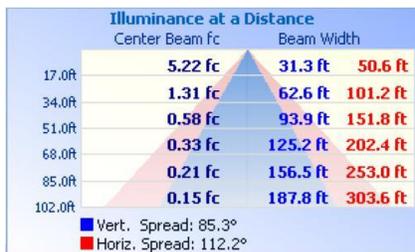

ELECTRICAL

Wattage	30W (Adjustable 70-100%)
Voltage	120-277V
Power Factor	>0.9
THD	<20%
Operating Temp	-40 to 50°C

CONSTRUCTION

Housing	Aluminum Alloy
Finish	Bronze
IP Rating	IP65
Fixture Weight	1.1 kg
Carton Weight	11.2 kg
Carton Qty	8
Carton Dimensions	484 x 302 x 297 mm

ACCESSORIES (SOLD SEPARATELY)

Knuckle Mount	FLM-KNS
---------------	---------

ISOCANDELA

